



2800 Series

2806-E18TAG2

Diesel Engine – Electropak

602 kWm at 1500 rpm

602 kWm at 1800 rpm



Economic Power

- Mechanically operated unit fuel injectors with electronic control combined with carefully matched turbocharging give excellent fuel atomisation and combustion with optimum economy
- Low emissions result from electronic control of fuel injected

Reliable Power

- Developed and tested using the latest engineering techniques and finite element analysis for high reliability, low oil usage and low wear rates
- High compression ratios also ensure clean rapid starting in all conditions
- Support comes from a worldwide network of 4000 distributors and dealers

Compact, Clean and Efficient Power

- Exceptional power to weight ratio and compact size give optimum power density with easier installation and cost effective transportation
- Designed to provide excellent service access for ease of maintenance

Clean Power

- The 2806-E18TAG2 is capable of meeting the requirements of TA luft (1986)

The Perkins 2800 Series is a family of well-proven 6 cylinder 16 and 18 litre in-line diesel engines, designed to address today's uncompromising demands within the power generation industry with particular aim at the standby market sector. Developed from a proven heavy-duty industrial base, the engine offers superior performance and reliability.

The 2806-E18TAG2 is a turbocharged and air-to-air charge cooled, 6 cylinder diesel engine of 18 litres capacity. Its premium features provide economic and durable operation, low gaseous emissions and advanced overall performance and reliability.

Engine Speed (rev/min)	Type of Operation	Typical Generator Output (Net)		Engine Power			
		kVA	kWe	Gross		Net	
				kWm	bhp	kWm	bhp
1500	Continuous Baseload*	508	406	453	607	437	586
	Prime Power	637	510	565	758	548	735
	Standby (maximum)	700	560	620	831	602	807
1800	Continuous Baseload*	570	456	513	688	490	657
	Prime Power	632	506	568	762	544	730
	Standby (maximum)	700	560	626	839	602	807

The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS 5514/1.

* Baseload ratings are under development and will be available later.

Derating may be required for conditions outside these; consult Perkins Engines Company Limited.

Generator powers are typical and are based on an average alternator efficiency and a power factor (cos. θ) of 0.8.

Fuel specification: BS 2869: Part 2 1998 Class A2 or ASTM D975 D2. Lubricating oil: 15W40 to API CG4.

Rating Definitions

Baseload Power: Power available for continuous full load operation. Overload of 10% permitted for 1 hour in every 12 hours operation.

Prime Power: Power available at variable load with a load factor not exceeding 80% of the prime power rating. Overload of 10% is permitted for 1 hour in every 12 hours operation.

Standby Power: Power available in the event of a main power network failure up to a maximum of 500 hours per year of which up to 300 hours may be run continuously. Load factor may be up to 100% of standby power. No overload is permitted.

2800 Series

2806-E18TAG2

Standard ElectropaK Specification

Air inlet

- Mounted air filter

Fuel system

- Mechanically actuated electronically controlled unit fuel injectors with full authority electronic control
- Governing to ISO 8528-5 class G2 with isochronous capability
- Replaceable 'Ecoplus' fuel filter elements with primary filter/water separator
- Fuel cooler

Lubrication system

- Wet sump with filler and dipstick
- Full-flow replaceable 'Ecoplus' filter
- Oil cooler integral with filter header

Cooling system

- Gear-driven circulating pump
- Mounted belt-driven pusher fan
- Radiator incorporating air-to-air charge cooler, (supplied loose)
- System designed for ambients up to 50°C
- Low coolant level switch

Electrical equipment

- 24 volt starter motor and 24 volt 70 amp alternator with DC output
- ECM mounted on engine with wiring looms and sensors
- 3 level engine protection system

Flywheel and housing

- High inertia flywheel to SAE J620 size 18
- SAE '0' flywheel housing

Mountings


- Front engine mounting bracket

Literature

- User's Handbook

Optional Equipment

- 110 volt/240 volt immersion heater
- Additional speed sensor
- Temperature and pressure sensors for gauges
- Electric hours counter
- Air filter rain hood
- Twin starters/facility for second starter
- Tool kit
- Parts manual/Workshop manual

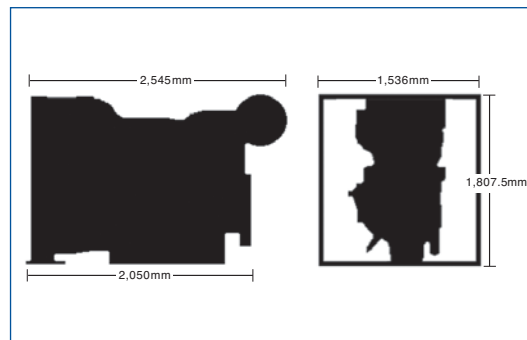

General Data

Number of cylinders	6
Cylinder arrangement	Vertical in-line
Cycle	4 stroke
Induction system	Turbocharged and air-to-air charge cooled
Combustion system	Direct injection
Cooling system	Water-cooled
Bore and stroke	145 mm x 183 mm
Displacement	18.1 litres
Compression ratio	14.5:1
Direction of rotation	Anti-clockwise, viewed on flywheel
Total lubrication system capacity	62 litres
Total coolant capacity	61 litres
Length	2,545 mm
Width	1,536 mm
Height	1,807.5 mm
Dry weight (ElectropaK)	2,050 kg

Final weight and dimensions will depend on completed specification

Fuel Consumption				
Engine Speed	1500 rev/min		1800 rev/min	
	g/kWh	l/hr	g/kWh	l/hr
At Standby Power Rating	202	144	208	148
At Prime Power Rating	198	128	206	132
At Baseload Power Rating	195	101	207	120
At 75% of Prime Power Rating	195	95	212	102
At 50% of Prime Power Rating	200	65	212	68



Perkins Engines Company Limited

Peterborough PE1 5NA
 United Kingdom
 Telephone +44 (0)1733 583000
 Fax +44 (0)1733 582240
www.perkins.com

Distributed by